


# 100m USB 3.2 Single Gang In-Wall HDBT-USB3 Transmitter and Receiver Kit

EX-100-IW-USBC


**WyreStorm**

## Specification Sheet

EX-100-IW-USBC (Front)

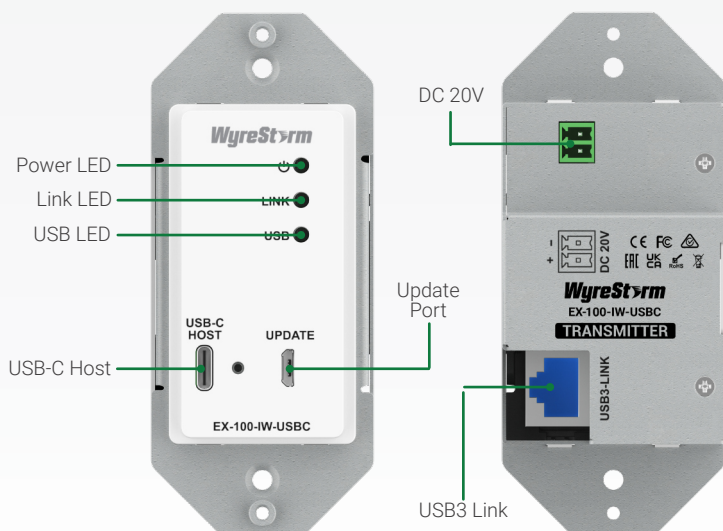

EX-100-IW-USBC (Rear)

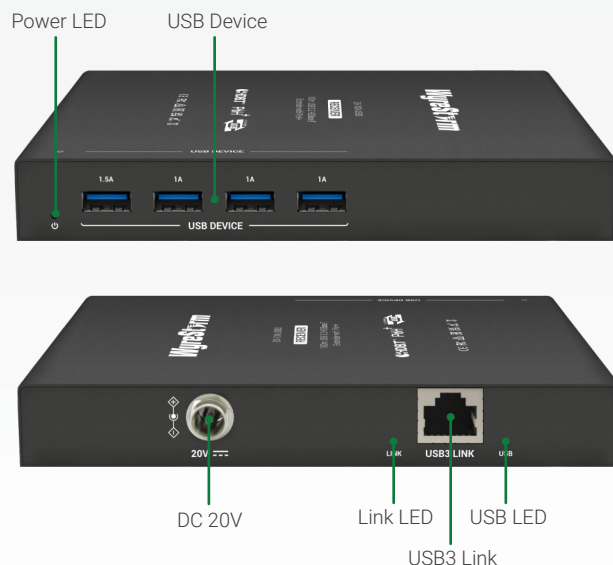

*WyreStorm - Powerful. Reliable. Simple.*

## Introduction

A versatile and powerful solution for extending your USB connectivity. Engineered to support the latest USB 3.2 Gen 1 standard, this extender offers rapid data transfer speeds of up to 5Gbps, ideal for a variety of high-performance USB peripherals. Its four-port design allows for simultaneous connection of multiple devices. With a remarkable capability to extend USB signals up to 100 meters, it ensures reliable, long-distance connectivity in a convenient form factor.

## Key Features

- Single Gang US Back Box
- Reliable 100m USB 3.2 extension (5Gbps)
- 4-Port Design
- PoH+

## In the Box

- 1x EX-100-IW-USBC Transmitter
- 1x EX-100-IW-USBC Receiver
- 1x DC 20V/3A Power Adaptor (US/UK/EU/AU)
- 1x 2m USB 3.2 Type-C to Type-C Cable
- 1x Wall Plate Plastic Panel (1-gang US) with Screws
- 2x Mounting Bracket with Screws
- 1x Quickstart Guide

# Specifications

Audio and Video	
Inputs	<b>TX:</b> 1x USB HOST (Type C), 1x DC IN, 1x Micro USB (Firmware update port) <b>RX:</b> 4x USB 3.2 Type A, 1x RJ45 Input
Outputs	<b>TX:</b> 1x RJ45 Output
Supported Standards	USB 3.2 Gen 1
Power	
Power Supply	DC 20V 3A with locking connector
Max. Power Consumption	39.79W (USB fully-loaded) 6.94W (No USB load)
Environmental	
Operating Temperature	0 to + 45°C (32 to + 113 °F), 10% to 90%, non-condensing
Storage Temperature	-20 to +70°C (-4 to + 158 °F), 10% to 90%, non-condensing
Dimensions and Weight	
Height	20.5mm/0.8in
Width	150mm/5.9in
Depth	100mm/3.93in
Regulatory	
Safety and Emission	CE   FCC   RoHS   RCM   EAC   UKCA

**Note:** WyreStorm reserves the right to change product specification, appearance or dimensions of this product at any time without prior notice.

## Warranty Information

WyreStorm Technologies ProAV Corporation warrants that its products to be free from defects in material and workmanship under normal use for a period of five (5) years from the date of purchase. Refer to the Product Warranty page on [wyrestorm.com](https://www.wyrestorm.com) for more details on our limited product warranty.

