



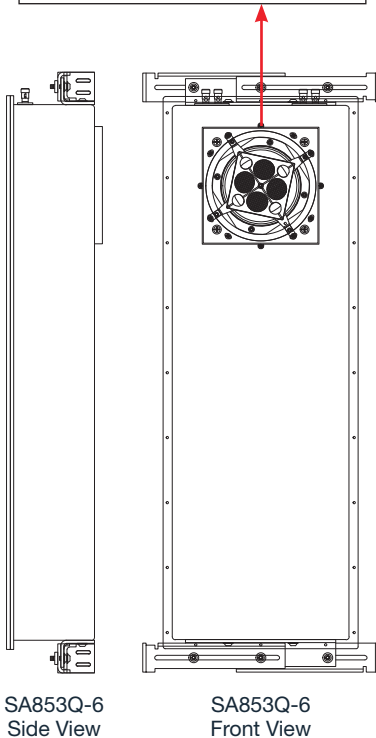

SMALL APERTURE SERIES | ULTRA-HIGH OUTPUT SPEAKER

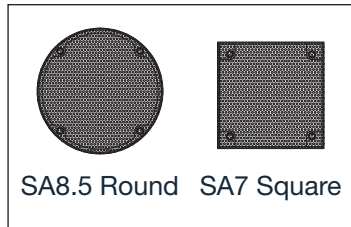

SA853Q-6 SHALLOW DEPTH SPEAKER

Astonishing full-range, ultra-high output performance from an in-ceiling design with a shallow 6" mounting depth.

- Aircraft Grade Aluminum Enclosure
- Bi-Amped Design
- Separate Midrange and Quad-Array Tweeter Module that installs into Enclosure
- High Excursion 10" PowerPipe Woofer Built-in for increased bass extension
- Designed to fit in a 2x6 stud bay

TECHNICAL SPECIFICATIONS

Enclosure	Aircraft Grade Aluminum
Woofer	One 10" (254mm) Aluminum Cone
Recommended Power	Mid/High: 50-150W Sub: 100-300W
Impedance	8 ohms (mid/high) / 8 ohms (sub)
Frequency Response	33Hz-20kHz +/-3dB
Sensitivity	90dB 2.83V/1m
Dims (WxHxD)	12" x 34" x 5.4" (304.8mm x 863.6mm x 137.16mm)
Dims with Mounting	Max Expansion 16.5" x 36.88"
Spacer Brackets (WxH)	(419.10mm x 936.75mm)
Mounting Depth	5.4" (137.16mm)
Finishes*	See SA8.5-GRILLE Round and SA7-GRILLE Square Trim Kit Options

REQUIRED PRODUCTS

SA853Q-6 Module

SPACER RINGS

- SA7-SP-0.125 1/8" Spacer Ring
- SA7-SP-0.375 3/8" Spacer Ring

TRIM KITS

- SA8.5-GRILLE-R-SR 8.5" Round Sheetrock
- SA8.5-GRILLE-R-SS 8.5" Round Solid Surface
- SA8.5-GRILLE-R-RF 8.5" Round Retrofit
- SA7-GRILLE-S-SR 7" Square Sheetrock
- SA7-GRILLE-S-SS 7" Square Solid Surface
- SA7-GRILLE-S-RF 7" Square Retrofit