


## Installation Instructions

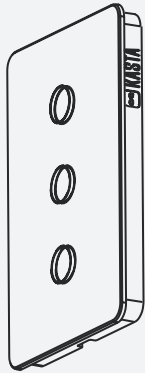

### HESPERUS Prescene Push Smart 1,2,3,4,6 Button Remote Switch

Product Code:  
H1RSMB/H2RSMB/H3RSMB/  
H4RSMB/H6RSMB

#### APP Installation

Visit [www.kasta.com.au](http://www.kasta.com.au) or your app store to download the free KASTA app.  
iOS: requires iOS 9.0 or later.  
Android: requires Android 4.4 or later.  
Devices must support Bluetooth 4.0



#### Important Safety Information

- This product must be installed by a licensed electrician in accordance with all the requirements of AS/NZS 3000 (current edition) and other relevant Standards and Regulations.
- Electricity MUST be disconnected prior to installation. Failure to do so may result in serious injury and or loss of life.
- Indoor use only. Not suitable for damp or explosive environments.
- Complies to Australian Standards AS/NZS 60950.1:2015, AS/NZS CISPR 15.
- No user serviceable parts inside.

#### FEATURES

- Mains powered capacitive touch remote switch mechanism.
- Simple 2 wire connection – A, N (LOOP available).
- Pairs to existing hard wired KASTA devices including: Switch Relays, Dimmers, Curtain controllers and many other devices.
- Configure smart functions via the KASTA app such as timers, scenes and groups.
- Fits most Australian Standard wall mounting accessories.
- Integral tri-colour backlight.
- Radar sensing backlight.
- To prevent a reduction in Bluetooth® signal strength, install away from metal objects.

#### FUNCTION SETUP

ON/OFF	1 PRESS
Turns paired device on or off. When paired with a dimmable light, light will adjust to previous brightness level.	
DIM UP/DOWN	ONE LONG PRESS
When paired with a light, long press button to dim up or down. Release button to stop.	
FULL BRIGHTNESS	2 PRESSES
When paired with a light, sets light to full brightness.	
DELAY TO OFF	3 PRESSES*
Paired device turns off automatically after a set time (configured in the app). Single click to cancel.	
VARIABLE	4 PRESSES*
Refer to the paired device for functionality.	
VARIABLE	5 PRESSES*
Refer to the paired device for functionality.	
BACKLIGHT	7 PRESSES*
Enable 10% backlight brightness. 7 presses to disable.	
FACTORY RESET	9 PRESSES

9 clicks of any button, restores all settings back to factory.  
\*If successful, the white LED indicator will flash once.

#### APP ENABLED FUNCTION

RETRIGGER TIMER	1 PRESS
-----------------	---------

Commence timer (on/off). Function must be programmed through the KASTA app first.

#### TECHNICAL SPECIFICATIONS

**Operating Temp:** -20°C to 40°C

**Supply:** 220-240V AC 50Hz

#### CONNECTION DIAGRAM

